



SEO YOUNG TECH. CO., LTD.

Renewable Energy Devices

SYG-208-R-400-380 AFPMG For VAWT and HAWT

No.	Parameter	Symbol	units	
1	AC Voltage(Line-Line)	E	V	220
2	Gen. Output Voltage			AC (3Phase)
3	Rotor			Permanent magnet type (outer rotor)
4	Stator			Coreless type
5	Output Power	P _o	W	400
6	Rated speed	ω	rpm	380
7	Speed Constant	K _E	V/rpm	0.67
8	Resistance(Line-Line)	R _T	Ω	32
9	Maximum Winding Temperature	C _{Max}	°C	130
10	Number of Pole	-	-	20
11	Winding type	-	-	Wye
12	Gen. Weight	W _M	Kg	11
13	Gen. Diameter	M _D	mm	245
14	Gen. Length	M _L	mm	116
15	Shaft. Diameter	M _D	mm	30
16	Housing Material	-	-	Aluminum (Alloy)
17	Shaft Material	-	-	Steel
18	Shaft Bearing	-	-	Ball

APPLICATION – Small Wind Turbine, Hydro Power, etc.

SEOYOUNG TECH Co., Ltd.

#276, Gongdan-dong, Gumi City, Kyungbuk, Korea 730-030



Tel: +82-54-442-4040 Fax: +82-54-442-4060

e-mail : evsmotor@evsmotor.co.kr or www.evsmotor.co.kr



SEO YOUNG TECH. CO., LTD.

Renewable Energy Devices

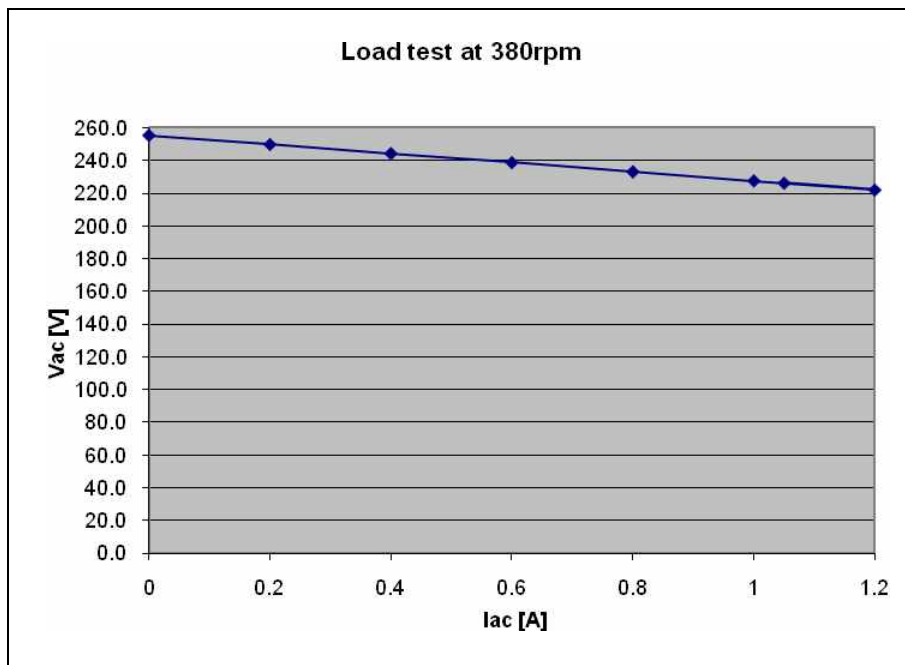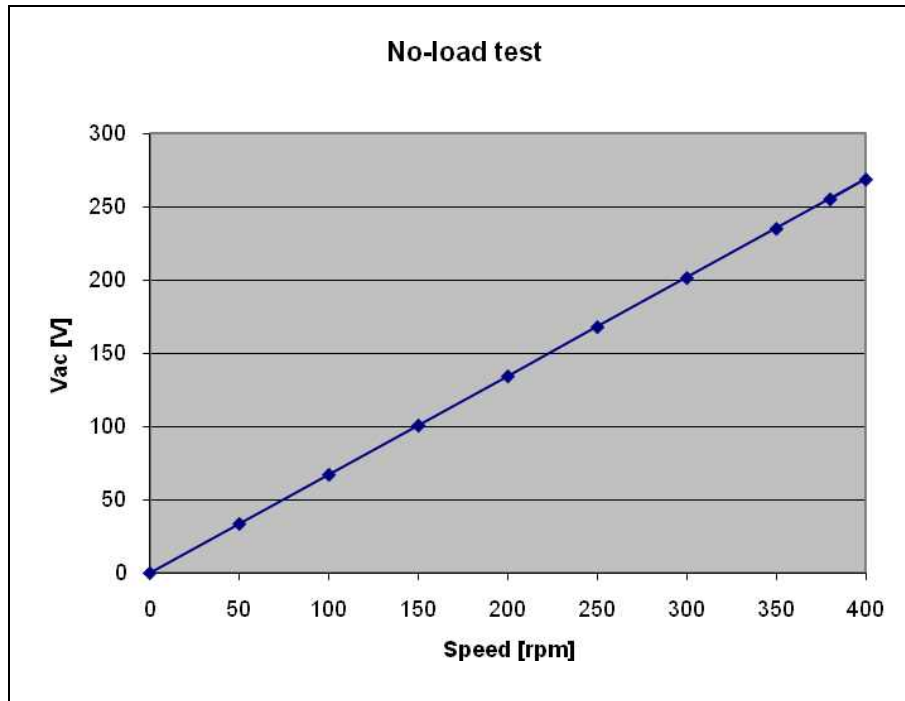

SEOYOUNG TECH Co., Ltd.
#276, Gongdan-dong, Gumi City, Kyungbuk, Korea 730-030
Tel: +82-54-442-4040 Fax: +82-54-442-4060
e-mail : evsmotor@evsmotor.co.kr or www.evsmotor.co.kr

